BiCore B-Li M Rugged

BiCore B-Li M Rugged SDemo

80

60

DATA SHEET

40



Made for **≰** iPhone | iPad | iPod

Earhook

- 60 dB / 133 dB SPL (2 ccm coupler)
- 67 dB / 138 dB SPL (Ear simulator)

ThinTube 3.0

- 60 dB / 125 dB SPL (2 ccm coupler)
- 64 dB / 129 dB SPL (Ear simulator)

ThinTube 3.0 P

- 63 dB / 126 dB SPL (2 ccm coupler)
- 68 dB / 131 dB SPL (Ear simulator)



BiCore B-Li M Rugged · Technical Data

Туре	Earhook		
	2 ccm coupler	Ear simulator	
Output sound pressure level			
OSPL 90 at 1.6 kHz		137 dB SPL	
OSPL 90 (peak)	133 dB SPL	138 dB SPL	
HFA OSPL 90	125 dB SPL	-	
Gain			
FOG at 1.6 kHz	_	64 dB	
FOG (peak)	60 dB	67 dB	
HFA FOG	54 dB	-	
Reference test gain	48 dB	57 dB	
Frequency, noise and directivity			
Frequency range 80	120 – 7700 Hz	940 – 7700 Hz	
60 / 40	120 – 7700 Hz	940 – 7700 Hz	
Equivalent input noise	17 dB SPL	17 dB SPL	
Total harmonic distortion at 500 / 800 / 1600 / 3200 Hz	4/3/1/1%	4/3/1/-%	
Tinnitus Function broadband	70 dB SPL	-	
AI-DI	4.0 dB		
Latency	< 15 ms		
Inductive coil sensitivity			
MASL (1 mA/m) at 1.6 kHz		95 dB SPL	
HFA MASL (1 mA/m)	84 dB SPL	-	
HFA SPLITS (left/right)	108 / 108 dB SPL	_	
RSETS (left/right)	0 / 0 dB	_	
HFA SPLIV	108 dB SPL	-	
Battery			
Battery runtime (without streaming)	up to 39 h		
Battery runtime (incl. 5 h streaming)	up to 36 h		
Cellphone Compatibility			
Microphone mode	0.65 – 0.96 GHz 1.4 – 2.7 GHz		
Telecoil mode	0.65 – 0.96 GHz 1.4 – 2.7 GHz		


Please find additional information to the values on page "Further information".

BiCore B-Li M Rugged · Technical Data

Туре	ThinTube 3.0		ThinTube 3.0 P	
	2 ccm coupler	Ear simulator	2 ccm coupler	Ear simulator
Output sound pressure level				
OSPL 90 at 1.6 kHz		121 dB SPL	_	126 dB SPL
OSPL 90 (peak)	125 dB SPL	129 dB SPL	126 dB SPL	131 dB SPL
HFA OSPL 90	116 dB SPL	_	121 dB SPL	-
Gain				
FOG at 1.6 kHz		54 dB	_	61 dB
FOG (peak)	60 dB	64 dB	63 dB	68 dB
HFA FOG	50 dB	_	56 dB	-
Reference test gain	39 dB	45 dB	44 dB	51 dB
Frequency, noise and directivity				
Frequency range 80 60 / 40	100 – 8100 Hz 100 – 8100 Hz	100 – 9500 Hz 100 – 8300 Hz	100 – 7200 Hz 100 – 7200 Hz	100 – 7400 Hz 100 – 7400 Hz
Equivalent input noise	19 dB SPL	19 dB SPL	16 dB SPL	18 dB SPL
Total harmonic distortion at 500 / 800 / 1600 / 3200 Hz	2/1/1/1%	4/3/3/-%	3/1/1/1%	4 / 4 / 2 / – %
Tinnitus Function broadband	70 dB SPL	_	70 dB SPL	-
AI-DI	4.0 dB		4.0 dB	
Latency	< 15 ms		< 15 ms	
Inductive coil sensitivity				
MASL (1 mA/m) at 1.6 kHz	_	80 dB SPL	_	86 dB SPL
HFA MASL (1 mA/m)	75 dB SPL	_	81 dB SPL	-
HFA SPLITS (left/right)	99 / 99 dB SPL	_	105 / 105 dB SPL	-
RSETS (left/right)	0 / 0 dB	_	1 / 1 dB	-
HFA SPLIV	99 dB SPL	_	104 dB SPL	-
Battery				
Battery runtime (without streaming)	up to 39 h		up to 39 h	
Battery runtime (incl. 5 h streaming)	up to 36 h		up to 36 h	
Cellphone Compatibility				
Microphone mode	0.65 – 0.96 GHz 1.4 – 2.7 GHz		0.65 – 0.96 GHz 1.4 – 2.7 GHz	
Telecoil mode	0.65 – 0.96 GHz 1.4 – 2.7 GHz		0.65 – 0.96 GHz 1.4 – 2.7 GHz	

Please find additional information to the values on page "Further information".

BiCore B-Li M Rugged · Fitting Range

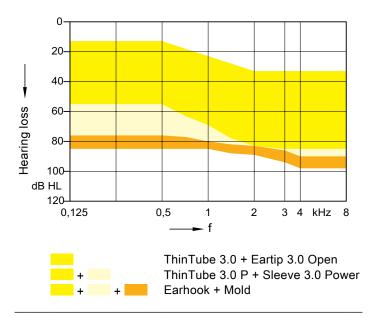

Earhook · Basic Data


2 ccm coupler

140 dB SPL 120 110 100 80 0.125 3 4 kHz **-** f

Max. Output sound pressure level $(L_1 = 90 \text{ dB})$


Full on gain $(L_1 = 50 \text{ dB})$

Ear simulator

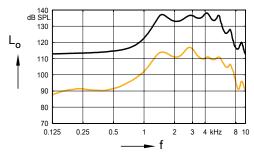


Max. Output sound pressure level $(L_1 = 90 dB)$

Full on gain $(L_1 = 50 \text{ dB})$

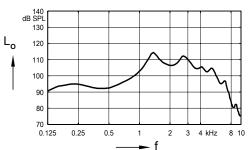


Frequency response $(L_1 = 60 \text{ dB})$

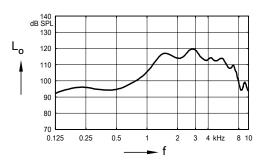


Basic acoustic response

 $(L_1 = 60 \text{ dB})$

Inductive response

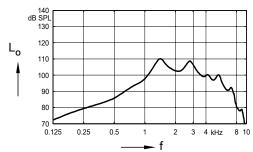


Inductive response (H = 10 mA/m)



SPLITS curve left

(H = 31.6 mA/m)

SPLITS curve right (H = 31.6 mA/m)

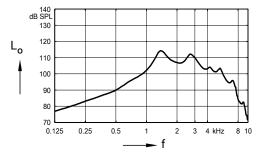

SPLIV curve (H = 31.6 mA/m)

ThinTube 3.0 · Basic Data


2 ccm coupler

140 dB SPL 130 120 110 100 80 0.125 2 3 4 kHz **-** f

Max. Output sound pressure level $(L_1 = 90 \text{ dB})$


Full on gain $(L_1 = 50 \text{ dB})$

Ear simulator

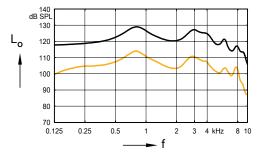


Max. Output sound pressure level $(L_1 = 90 dB)$

Full on gain $(L_1 = 50 \text{ dB})$

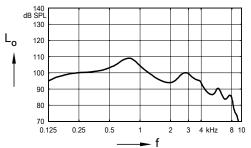


Frequency response $(L_1 = 60 \text{ dB})$

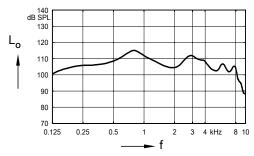


Basic acoustic response $(L_1 = 60 \text{ dB})$

Inductive response

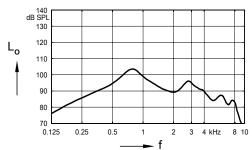

Inductive response (H = 10 mA/m)

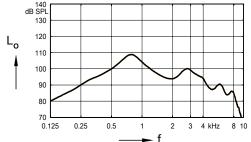


SPLITS curve left

(H = 31.6 mA/m)

right (H = 31.6 mA/m)

SPLITS curve

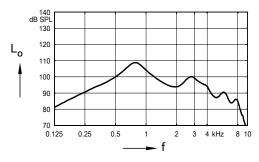

SPLIV curve (H = 31.6 mA/m)

ThinTube 3.0 P · Basic Data


2 ccm coupler

140 dB SPL 120 110 100 80 0.125 3 4 kHz **-** f

Max. Output sound pressure level $(L_1 = 90 \text{ dB})$


Full on gain $(L_1 = 50 \text{ dB})$

Ear simulator

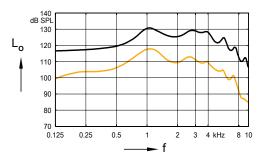


Max. Output sound pressure level $(L_1 = 90 dB)$

Full on gain $(L_1 = 50 \text{ dB})$

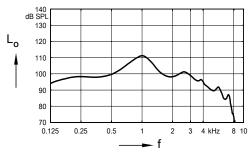


Frequency response $(L_1 = 60 \text{ dB})$

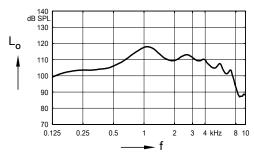


Basic acoustic response $(L_1 = 60 \text{ dB})$

Inductive response

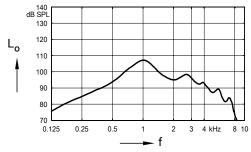


Inductive response (H = 10 mA/m)

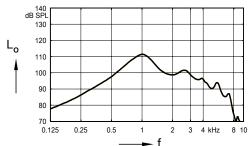

SPLITS curve left (H = 31.6 mA/m)

SPLITS curve right (H = 31.6 mA/m)

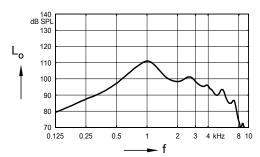

SPLIV curve (H = 31.6 mA/m)

BiCore B-Li M Rugged · Features and Accessories

	80	60	40	
Features				
Ingress Protection Rating	IP68	IP68	IP68	
Channels / Controls / Programs	48 / 20 / 6	32 / 16 / 6	24 / 12 / 6	
Soundpro 2.0	High Res	High Res	High Res	
My Voice 2.0 (Own Voice Processing)	•	•	•	
Direct Streaming	Made for iPhone/ Android version 10 or higher (ASHA)	Made for iPhone/ Android version 10 or higher (ASHA)	Made for iPhone/ Android version 10 or higher (ASHA)	
Headset Mode for iOS	•	•	•	
Auto Volume	•	•	•	
Wireless Sync	•	•	•	
Directionality	Automatic adaptive, iOmni, Front/Back / Left/Right automatic & manual, Narrow	Automatic adaptive, iOmni, Front/Back automatic & manual, Left/Right manual, Narrow	Automatic adaptive, iOmni, Narrow	
Noise Reduction	Noise Management, SoundSmoothing, Directional	Noise Management, SoundSmoothing, Directional	Noise Management, SoundSmoothing	
Wind Noise Reduction	•	•	•	
Auto Echo Reducer	•	_	_	
Reverb Reducer	•	•	_	
Bandwidth: Extension/Compression	• / •	-1 ●	- /●	
Music Enhancer (presets)	3	3	1	
Tinnitus Function	Sound Therapy, Notch Therapy	Sound Therapy, Notch Therapy	Sound Therapy, Notch Therapy	
XPhone	•	•	•	
Acclimatization / Data Logging	● / ●	● / ●	● / ●	
T-Coil	•	•	•	
Battery door – tamper proof		_	_	
Battery size	_	_	_	
Accessories				
Smart Key	0	0	0	
Smart Transmitter 2,4	0	0	0	
Smart Mic	0	0	0	
Rexton APP	0	0	0	
Noahlink Wireless	mandatory	mandatory	mandatory	
Charging Station B-M	mandatory	mandatory	mandatory	
Small earhook	0	0	0	
BiCore CROS R-Li	0	0	0	
BiCore CROS R312	0	0	0	
BiCore CROS SR	_	_	_	

[●] available — not available O optional

BiCore B-Li M Rugged · Further information

Abbreviations

The following abbreviations are used in this datasheet:

SPL Sound Pressure Level

OSPL Output Sound Pressure Level HFA High Frequency Average

FOG Full-On Gain

MASL Magneto Acoustical Sensitivity Level

SPLITS Coupler SPL for an Inductive Telephone Simulator RSETS Relative Simulated Equivalent Telephone Sensitivity

SPLIV SPL In a Vertical magnetic field
AI-DI Articulation Index - Directivity Index
IRIL Input Related Interference Level
RTF Reference Test Frequency
ASHA Audio streaming for hearing aids

Standards and additional information

- All measurements with the 2 ccm coupler were performed according to ANSI S3.22-2014 and IEC 60118-0:2015 if applicable.
- All measurements with an ear simulator were performed according to IEC 60118-0:1983 + A1:1994 and to DIN 45605 (frequency range) if applicable.
- All Cellphone Compatibility measurements were performed according to IEC 60118-13:2019, EN IEC 60118-13:2020 and ANSI C63.19-2019.
- Cellphone Compatibility definition: It is expected that the hearing aid user can effectively use a compliant wireless device held in a talking position at the ear. Maximum achievable Cellphone Compatibility range: 0.65–0.96 GHz and 1.4–2.7 GHz.
- Curves and figures representing FOG are measured with 20 dB reduction and 70 dB SPL input level.
- Figures representing Equivalent Input Noise incorporate a moderate expansion.
- Tinnitus noiser measurement conditions: all tinnitus single frequency sliders in max position, master volume slider in default position (0 dB) and local volume control in default position.
- Inductive coil sensitivity values, inductive response curves and T ratings apply for instruments with telecoil only.
- The current consumption is measured in reference test setting (RTS) according to the applicable standards. Due to the settling behaviour of hearing aids supporting RF (radio frequency), the battery current is measured 3 minutes after turning on (note: no pairing).
- The battery runtime is based on first fit settings using 60 % of the fitting range and an ISTS (International Speech Test Signal) input signal at 65 dB SPL (note: pairing established). The actual battery runtime is determined by battery quality, hearing loss, sound environment, usage and activated feature set. Regarding RF usage, Bluetooth audio streaming from phone to hearing aid and from hearing aid to phone are considered.
- Extended bandwidth up to 10 kHz for 80 devices only.
- The following acoustic connections / ear pieces were used:
 - Earhook
 - ThinTube 3.0
 - ThinTube 3.0 P

Special note for instruments with built-in lithium-ion rechargeable battery

The runtime of all lithium-ion rechargeable batteries reduces over time. The estimates are based on fresh lithium-ion rechargeable battery capacity. Under normal operating conditions, the battery will retain up to 80 % of its initial capacity after 2 years of use. Please note that battery performance will vary depending on individual usage patterns and environmental conditions.



"Made for iPhone", "Made for iPad", and "Made for iPod" mean that an electronic accessory has been designed to connect specifically to iPhone, iPad, or iPod, respectively, and has been certified by the developer to meet Apple performance standards. Apple is not responsible for the operation of this device or its compliance with safety and regulatory standards. Please note that the use of this accessory with iPhone, iPad, or iPod may affect wireless performance.

The information in this document contains general descriptions of the technical options available, which do not always have to be present in individual cases and are subject to change without prior notice. The required features should therefore be specified in each individual case at the time of conclusion of the respective contract.

Legal Manufacturer WSAUD A/S Nymøllevej 6 3540 Lynge

Denmark

 ϵ

Order No. 05294-99T01-7600 www.wsaud.com © 12.2022, WSAUD A/S All rights reserved

Subject to change without prior notice

⚠ WARNING

Choking hazard posed by small parts.

▶ This instrument is not intended for the fitting of infants, children under 3 years or persons of mental incapacity.



⚠ WARNING

Instrument has an output sound pressure level of 132 dB SPL or more. Risk of impairing the residual hearing of the user.

▶ Take special care when fitting this instrument.